

| Standby      | Prime        | Voltages          | Freq. | PF  | Alternator Leads |
|--------------|--------------|-------------------|-------|-----|------------------|
| 500KW/625KVA | 455KW/568KVA | 220/127, 208/120, | 60Hz  | 0,8 | 3Ph, 4W, 12 Lead |



## GENERAL SPECIFICATIONS

| Engine                                                                                    | Alternator                                                                                     | Control Panel                                                                           |
|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
|  Perkins |  LEROY SOMER |  DSE |
| <b>2506A-E15TAG4</b>                                                                      | <b>FGL60020</b>                                                                                | <b>FG100</b>                                                                            |
| 6 cyl in Line                                                                             | 3 Phase                                                                                        | Auto Start                                                                              |
| 18,1 Ltr.                                                                                 | 12 Lead                                                                                        | 7 inputs/6 outputs                                                                      |
| Electronic/ECM                                                                            | 4pole, 1 Bearing                                                                               | 3 analog inputs                                                                         |
| Turbo/Aftercooled                                                                         | R150 AVR                                                                                       | Remote Monitor                                                                          |

| Weights & Dimensions |           |        |
|----------------------|-----------|--------|
|                      | OPEN UNIT | SILENT |
| Length (L)mm         | 3800      | 4930   |
| Width (W)mm          | 1131      | 1658   |
| Height (H)mm         | 2215      | 2147   |
| Net Weight kg        | 3656      | 5071   |





| Fuel Consumption /l             | Liters      | Gallons      |
|---------------------------------|-------------|--------------|
| 100% Standby Power              | 122,0       | 32,2         |
| 100% Prime Power                | 112,0       | 29,6         |
| 75% Prime Power                 | 87,0        | 23,0         |
| 50% Prime Power                 | 63,0        | 16,6         |
| Fuel Tank Capacity, Open Unit   | <b>888</b>  | <b>240,2</b> |
| Fuel Tank Capacity, Canopy Unit | <b>1050</b> | <b>277,2</b> |

### Standby Rating:

According to ISO 8528-1:2005, standby power is the maximum power available during variable electrical power sequence, under the stated operational conditions for which a generating set is capable of delivering in the event of a utility power outage for up to 200 hrs. per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average power output over a 24 hr. period shall not exceed 70% of this rating.

### Prime Rating:

According to ISO 8528-1:2005, prime power is the maximum power which a generating set is capable of delivering continuously while supplying a variable electrical load when operated for an unlimited number of hours per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average output (Ppp) over a 24 hr. period

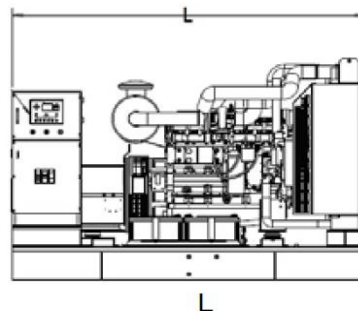

Blue Power gensets are compliant with EC mark which include the following directives:

- \* 2006/42/EC Machinery Safety.
- \* 2006/95/EC Low Voltage.

# P625

## Engine Specifications

|                               |                      |
|-------------------------------|----------------------|
| Engine Model                  | 2506A-E15TAG4        |
| Engine Type                   | 6 Cyl. In-Line       |
| Bore x Stroke (mm)            | 137-171              |
| Displacement (L)              | 15,2                 |
| Engine H.P. at 100% Standby P | 729                  |
| Compression Ratio             | 16.0:1               |
| Aspiration Type               | Turbo/Chr Air Cooler |
| Intake Air Flow (Ltr/sec.)    | 700                  |
| Injection Type                | MEUI/ECM             |
| Governor Type                 | Electronic/ecm       |
| Coolant Capacity Eng.         | 58.1L                |
| Oil Pan Capacity              | 62L                  |
| Electrical System Voltage     | 24vdc                |
| Max Exhaust Back Pressure     | 6,8 kPa              |
| Exhaust Gas Flow (Ltr/sec.)   | 1867 Ltr/sec         |
| Exhaust Gas Temp.             | 511 C°               |



## A.C. Alternator Data

|                    |                  |                    |          |
|--------------------|------------------|--------------------|----------|
| Leroy Somer Model  | FGL60020         | Standard AVR Model | R150     |
| Winding Type       | 12 Lead, 3 Phase | Excitation Type    | Shunt    |
| Power Factor       | 0,8              | Voltage Regulation | ±1.0%    |
| Insulation Class   | H                | Max. Overspeed     | 2250 rpm |
| Winding Pitch      | 2/3              | THF                | <2%      |
| Ingress Protection | IP23             | TIF                | <50      |

| Alternator Performance Data             |            | 60 Hz      |            |            |             |
|-----------------------------------------|------------|------------|------------|------------|-------------|
| <b>Voltage Series Star (WYE)</b>        | 380        | 416        | 440        | 480        |             |
| <b>Voltage Delta</b>                    | 220        | 240        | 254        | 277        |             |
| <b>*kVA Base Rating at 0.8 Pf</b>       | <b>660</b> | <b>725</b> | <b>755</b> | <b>825</b> |             |
| <b>Locked Rotor Motor Starting kVA*</b> |            |            |            |            | <b>1100</b> |

\*Base Ratings are for Standby - 163°/27°C Rise/Amb.

\*\*at 30% voltage dip, 0.6 Pf

Leroy Somer complies with international standards and regulations: IEC 60034 and derivative, they are designed, manufactured and marketed in ISO 9001 & 14001 environment and can be integrated into a CE market generator set

# DEEPSEA FG100

## Benefits

- ▶ Single gen-set controller for standby and prime applications
- ▶ Direct Communications with EFI engines
- ▶ All-in-one intuitive & powerful PC tool for configuration/monitoring/control



## Features

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>▶ Standby and Prime power application in one unit</li> <li>▶ 5 languages in the controller and translator functionality</li> <li>▶ 3 levels of password security</li> <li>▶ 3 sets of alternative configurations</li> <li>▶ Magnetic pick-up input</li> <li>▶ ECU support and TIER4 Final ready</li> <li>▶ Plug-in Module concept for more capabilities (Modbus, Internet, SMS, inputs/outputs)</li> <li>▶ 1 slot for Plug-in modules</li> <li>▶ Power over USB for controller adjustments</li> <li>▶ Adjustable D+ threshold</li> <li>▶ Ventilation pulse</li> <li>▶ Flexible Choke</li> <li>▶ Fuel pump control</li> <li>▶ 3 analog inputs, 6+1 binary inputs, 6</li> </ul> | <ul style="list-style-type: none"> <li>binary outputs</li> <li>▶ 2 higher current binary outputs</li> <li>▶ Adjustable delay for binary inputs</li> <li>▶ Alarms and gen-set status assignable to binary outputs</li> <li>▶ Run hours source ECU or internal</li> <li>▶ Real time clock</li> <li>▶ Multi purpose scheduler functionality</li> <li>▶ 3 maintenance timers</li> <li>▶ Detailed history log with up to 150 records</li> <li>▶ Zero power mode</li> <li>▶ Possibility to disable protections</li> <li>▶ Modbus register mapping possibility</li> <li>▶ Start on Low Battery (only for native prime power configuration)</li> <li>▶ Cutout dimensions: 172mm x 112mm (same as Intellilite NT family)</li> </ul> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## ComAp IntelliLite Control Panel meets the following certificates and standards:

- |                                                                                                                                                                                                 |                                                                                                                                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• EN61000-6-2</li> <li>• EN61000-6-4</li> <li>• EN61010-1</li> <li>• EN61000-2-1 (-20°C/16h for std version)</li> <li>• EN6100-2-2 (70°C/16h)</li> </ul> | <ul style="list-style-type: none"> <li>• EN61000-2-6 (2÷25Hz/ ±1,6mm; 25÷100 Hz/4,0 g)</li> <li>• EN61000-2-27 (a=500 m/s<sup>2</sup>; T=6 ms)</li> <li>• EN61000-2-30</li> <li>• EN60529 (front panel IP65, back side IP20)</li> </ul> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|