






## C125

### OUTPUT RATING 60 Hz, 3 Phase





Standby	Prime	Voltages
100 kW	90 kW	208/120, 220/127
125 kVA	113 kVA	440/254, 480/277
0.8 Pf		12 lead re-connectable

### GENERAL SPECIFICATIONS

Engine	Alternator	Control Panel
		
<b>6BT5.9G2</b>	<b>TAL-A44-E</b>	<b>InteliLite IL-9</b>
6 cyl in Line	3 Phase	Auto Start
5.9 Ltr.	12 Lead	7 inputs/6 outputs
Elect. Speed Gov.	4 pole, 1 Bearing	3 analog inputs
Turbocharged	R120 AVR	Remote Monitor

### Weights & Dimensions

	Open	Silent
Length (L)mm	2150	3170
Width (W)mm	1025	1100
Height (H)mm	1530	1780
Net Weight kg	1206	1710

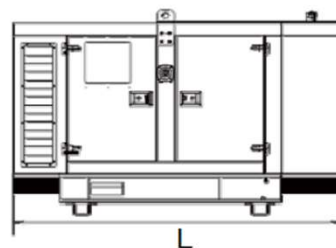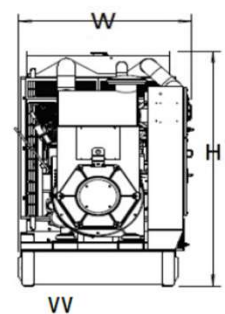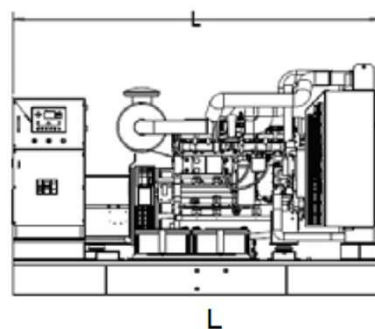

### Fuel Consumption /hr

	Liters	Gallons
100% Standby Power	31.3	8.3
100% Prime Power	28.5	7.5
75% Prime Power	20.7	5.5
50% Prime Power	14.4	3.8

<b>Fuel Tank Capacity, Open Unit</b>	<b>230</b>	<b>60.7</b>
<b>Fuel Tank Capacity, Canopy Unit</b>	<b>200</b>	<b>52.8</b>

#### Standby Rating:

According to ISO 8528-1:2005, standby power is the maximum power available during variable electrical power sequence, under the stated operational conditions for which a generating set is capable of delivering in the event of a utility power outage for up to 200 hrs. per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average power output over a 24 hr. period shall not exceed 70% of this rating.

#### Prime Rating:

According to ISO 8528-1:2005, prime power is the maximum power which a generating set is capable of delivering continuously while supplying a variable electrical load when operated for an unlimited number of hours per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average output (Ppp) over a 24 hr. period shall not exceed 70% of this rating.

Blue Power gensets are compliant with EC mark which include the following directives:

\* 2006/42/EC Machinery Safety.

\* 2006/95/EC Low Voltage.

\* EN 60204-1 2006+A1:2009, EN ISO 12100: 2010, EN ISO 13849-1: EN 12601: 2010

### Engine Specifications

Engine Model	6BT5.9G2
Engine Type	6 Cyl. In-Line
Bore x Stroke (mm)	102x120
Displacement (L)	5.9L
Engine H.P. at 100% Standby Power	147
Compression Ratio	17.3:1
Aspiration Type	Turbocharged
Intake Air Flow (Ltr/sec.)	112
Injection Type	Mechanical/Direct
Governor Type	Electronic
Coolant Capacity Eng.	7.9L
Oil Pan Capacity	16.4L
Electrical System Voltage	24vdc
Max Exhaust Back Pressure	10 kPa
Exhaust Gas Flow (Ltr/sec.)	319
Exhaust Gas Temp.	577 C°



### A.C. Alternator Data

Leroy Somer Model	TAL-A44-E	Standard AVR Model	R120
Winding Type	12 Lead, 3 Phase	Excitation Type	Shunt
Power Factor	0.8	Voltage Regulation	±1.0%
Insulation Class	H	Max. Overspeed	2250 rpm
Winding Pitch	2/3	THF	<2%
Ingress Protection	IP23	TIF	<50

Alternator Performance Data		60 Hz			
<b>Voltage Series Star (WYE)</b>	380	416	440	480	
<b>Voltage Delta</b>	220	240	254	277	
<b>kVA Base Rating at 0.8 Pf</b>	<b>130</b>	<b>143</b>	<b>150</b>	<b>165</b>	
<b>Locked Rotor Motor Starting kVA*</b>					<b>350</b>


Base rating for Standby- 163°/27°C

\*30% Volt dip @ 0.6 Pf

Leroy Somer complies with international standards and regulations: IEC 60034 and derivative, they are designed, manufactured and marketed in ISO 9001 & 14001 environment and can be integrated into a CE market generator set.

## Benefits

- ▶ Single gen-set controller for standby and prime applications
- ▶ Direct Communications with EFI engines
- ▶ All-in-one intuitive & powerful PC tool for configuration/monitoring/control, locally or remotely

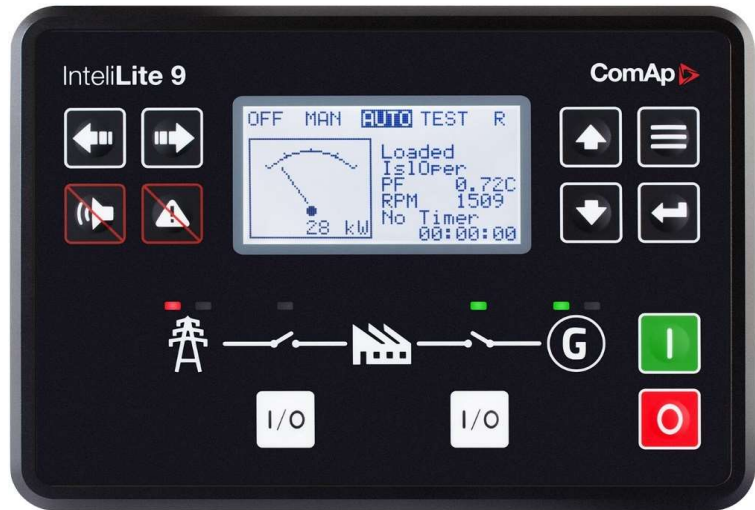

## Features

- ▶ Standby and Prime power application in one unit
- ▶ 5 languages in the controller and translator functionality
- ▶ 3 levels of password security
- ▶ 3 sets of alternative configurations
- ▶ Magnetic pick-up input
- ▶ ECU support and TIER4 Final ready
- ▶ Plug-in Module concept for more capabilities (Modbus, Internet, SMS, inputs/outputs)
- ▶ 1 slot for Plug-in modules
- ▶ Power over USB for controller adjustments
- ▶ Adjustable D+ threshold
- ▶ Ventilation pulse
- ▶ Flexible Choke
- ▶ Fuel pump control
- ▶ 3 analog inputs, 6+1 binary inputs, 6 binary outputs
- ▶ 2 higher current binary outputs
- ▶ Adjustable delay for binary inputs
- ▶ Alarms and gen-set status assignable to binary outputs
- ▶ Run hours source ECU or internal
- ▶ Real time clock
- ▶ Multi purpose scheduler functionality
- ▶ 3 maintenance timers
- ▶ Detailed history log with up to 150 records
- ▶ Zero power mode
- ▶ Possibility to disable protections
- ▶ Modbus register mapping possibility
- ▶ Start on Low Battery (only for native prime power configuration)
- ▶ Cutout dimensions: 172mm x 112mm (same as Intellilite NT family)



### ComAp IntelliLite AMF 20 Control Panel meets the following certificates and standards:

- EN61000-6-2
- EN61000-6-4
- EN61010-1
- EN61000-2-1 (-20°C/16h for std version)
- EN6100-2-2 (70°C/16h)
- EN61000-2-6 (2÷25Hz/ ±1,6mm; 25÷100 Hz/4,0 g)
- EN61000-2-27 (a=500 m/s²; T=6 ms)
- EN61000-2-30
- EN60529 (front panel IP65, back side IP20)

