






## C150

### OUTPUT RATING 60 Hz, 3 Phase





Standby	Prime	Voltages
120 kW	110 kW	208/120, 220/127
150 kVA	138 kVA	440/254, 480/277
0.8 Pf		12 lead re-connectable

### GENERAL SPECIFICATIONS

Engine	Alternator	Control Panel
		
<b>6BTA5.9G2</b>	<b>TAL-A44-H</b>	<b>InteliLite IL-9</b>
6 cyl in Line	3 Phase	Auto Start
5.9 Ltr.	12 Lead	7 inputs/6 outputs
Elect. Speed Gov.	4 pole, 1 Bearing	3 analog inputs
Turbo/Aftercooled	R120 AVR	Remote Monitor

### Weights & Dimensions

	Open	Silent
Length (L)mm	2300	3170
Width (W)mm	1025	1100
Height (H)mm	1530	1780
Net Weight kg	1256	1750

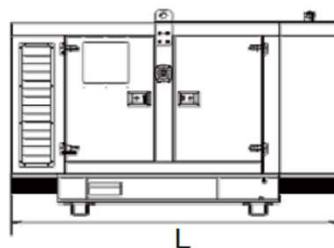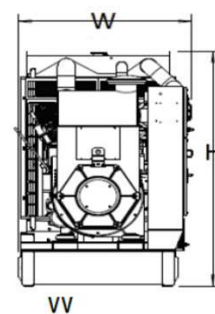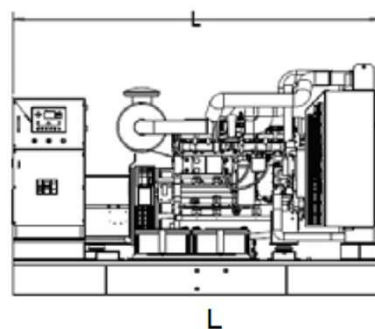

### Fuel Consumption /hr

	Liters	Gallons
100% Standby Power	34.0	9.0
100% Prime Power	31.0	8.2
75% Prime Power	23.0	6.1
50% Prime Power	16.0	4.2

<b>Fuel Tank Capacity, Open Unit</b>	<b>300</b>	<b>79.2</b>
<b>Fuel Tank Capacity, Canopy Unit</b>	<b>200</b>	<b>52.8</b>

#### Standby Rating:

According to ISO 8528-1:2005, standby power is the maximum power available during variable electrical power sequence, under the stated operational conditions for which a generating set is capable of delivering in the event of a utility power outage for up to 200 hrs. per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average power output over a 24 hr. period shall not exceed 70% of this rating.

#### Prime Rating:

According to ISO 8528-1:2005, prime power is the maximum power which a generating set is capable of delivering continuously while supplying a variable electrical load when operated for an unlimited number of hours per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average output (Ppp) over a 24 hr. period shall not exceed 70% of this rating.

**Blue Power** gensets are compliant with EC mark which include the following directives:


\* 2006/42/EC Machinery Safety.

\* 2006/95/EC Low Voltage.

\* EN 60204-1 2006+A1:2009, EN ISO 12100: 2010, EN ISO 13849-1: EN 12601: 2010

## Engine Specifications

Engine Model	6BTA5.9G2
Engine Type	6 Cyl. In-Line
Bore x Stroke (mm)	102x120
Displacement (L)	5.9L
Engine H.P. at 100% Standby Power	147
Compression Ratio	17.3:1
Aspiration Type	Turbo/Aftercooled
Intake Air Flow (Ltr/sec.)	142
Injection Type	Mechanical/Direct
Governor Type	Electronic
Coolant Capacity Eng.	10L
Oil Pan Capacity	16.4L
Electrical System Voltage	24vdc
Max Exhaust Back Pressure	10 kPa
Exhaust Gas Flow (Ltr/sec.)	406
Exhaust Gas Temp.	580 C°

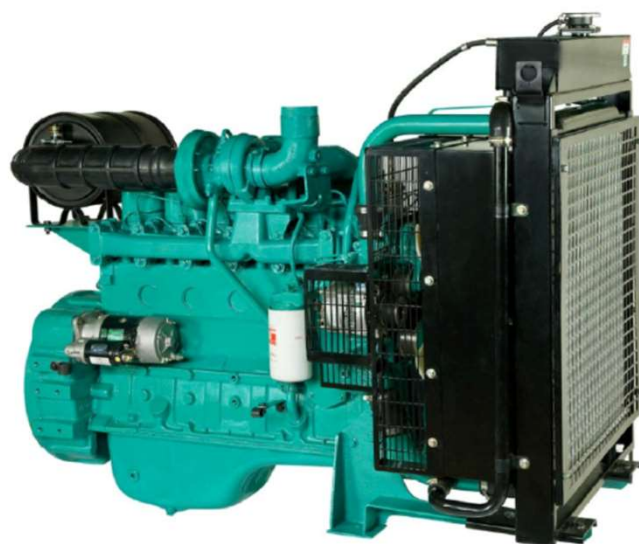

## A.C. Alternator Data

Lerot Somer Model	TAL-A44-H	Standard AVR Model	R120
Winding Type	12 Lead, 3 Phase	Excitation Type	Shunt
Power Factor	0.8	Voltage Regulation	±1.0%
Insulation Class	H	Max. Overspeed	2250 rpm
Winding Pitch	2/3	THF	<2%
Ingress Protection	IP23	TIF	<50

Alternator Performance Data		60 Hz			
Voltage Series Star (WYE)	380	416	440	480	
Voltage Delta	220	240	254	277	
kVA Base Rating at 0.8 Pf	147	161	170	186	
Locked Rotor Motor Starting kVA*				475	

Base Ratings are for Standby - 163/27°C Rise/Amb.

\*at 40% voltage dip and 0.6 Pf


Leroy Somer complies with international standards and regulations: IEC 60034 and derivative, they are designed, manufactured and marketed in ISO 9001 & 14001 environment and can be integrated into a CE market generator set.

## Product Description

- ▶ Single gen-set controller for standby and prime applications
- ▶ Direct Communications with EFI engines
- ▶ All-in-one intuitive & powerful PC tool for configuration/monitoring/control, locally or remotely

## Key Features

- ▶ Standby and Prime power application in one unit
- ▶ 5 languages in the controller and translator functionality
- ▶ 3 levels of password security
- ▶ 3 sets of alternative configurations
- ▶ Magnetic pick-up input
- ▶ ECU support and TIER4 Final ready
- ▶ Plug-in Module concept for more capabilities (Modbus, Internet, SMS, inputs/outputs)
- ▶ 1 slot for Plug-in modules
- ▶ Power over USB for controller adjustments
- ▶ Adjustable D+ threshold
- ▶ Ventilation pulse
- ▶ Flexible Choke
- ▶ Fuel pump control
- ▶ 3 analog inputs, 6+1 binary inputs, 6 binary outputs
- ▶ 2 higher current binary outputs
- ▶ Adjustable delay for binary inputs
- ▶ Alarms and gen-set status assignable to binary outputs
- ▶ Run hours source ECU or internal
- ▶ Real time clock
- ▶ Multi purpose scheduler functionality
- ▶ 3 maintenance timers
- ▶ Detailed history log with up to 150 records
- ▶ Zero power mode
- ▶ Possibility to disable protections
- ▶ Modbus register mapping possibility
- ▶ Start on Low Battery (only for native prime power configuration)
- ▶ Cutout dimensions: 172mm x 112mm (same as Intellilite NT family)

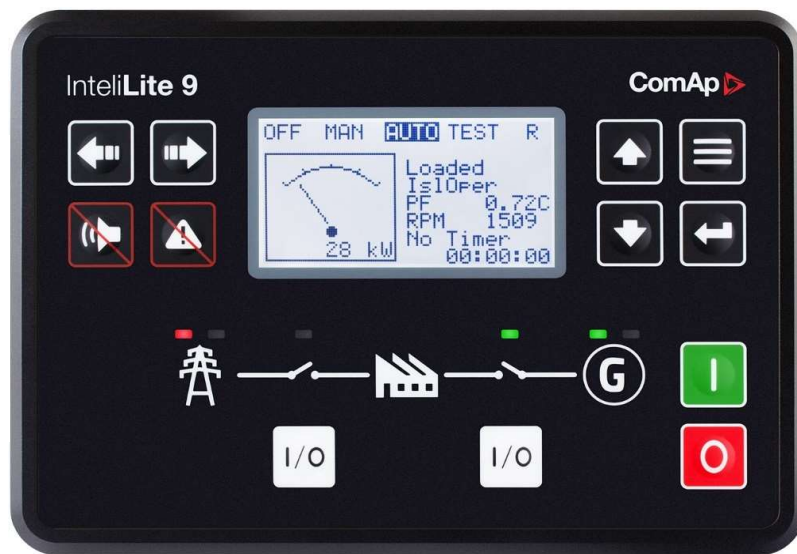

### ComAp IntelliLite Control Panel meet the following certificates and standards:

- EN61000-6-2
- EN61000-6-4
- EN61010-1
- EN61000-2-1 (-20°C/16h for std version)
- EN6100-2-2 (70°C/16h)
- EN61000-2-6 (2÷25Hz/ ±1,6mm; 25÷100 Hz/4,0 g)
- EN61000-2-27 (a=500 m/s²; T=6 ms)
- EN61000-2-30
- EN60529 (front panel IP65, back side IP20)

