

Standby	Prime	Voltages	Freq.	PF	Alternator Leads
400KW/500KVA	350KW/400KVA	220/127, 208/120,	60Hz	0,8	3Ph, 4W, 12 Lead



GENERAL SPECIFICATIONS

Engine	Alternator	Control Panel
 Perkins	 LEROY SOMER	 DSE
2206A-E13TAG6	FG29A320	FG100
6 cyl in Line	3 Phase	Auto Start
18,1 Ltr.	12 Lead	7 inputs/6 outputs
Electronic/ECM	4pole, 1 Bearing	3 analog inputs
Turbo/Aftercooled	R150 AVR	Remote Monitor

Weights & Dimensions		
	OPEN UNIT	SILENT
Length (L)mm	3800	4930
Width (W)mm	1131	1658
Height (H)mm	2156	2147
Net Weight kg	3253	5071





Fuel Consumption /l	Liters	Gallons
100% Standby Power	99,0	26,1
100% Prime Power	87,0	23,0
75% Prime Power	67,0	17,7
50% Prime Power	48,0	12,7
Fuel Tank Capacity, Open Unit	888	240,2
Fuel Tank Capacity, Canopy Unit	1050	277,2

Standby Rating:

According to ISO 8528-1:2005, standby power is the maximum power available during variable electrical power sequence, under the stated operational conditions for which a generating set is capable of delivering in the event of a utility power outage for up to 200 hrs. per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average power output over a 24 hr. period shall not exceed 70% of this rating.

Prime Rating:

According to ISO 8528-1:2005, prime power is the maximum power which a generating set is capable of delivering continuously while supplying a variable electrical load when operated for an unlimited number of hours per year while meeting manufacturers recommended operation and maintenance requirements. The permissible average output (Ppp) over a 24 hr. period

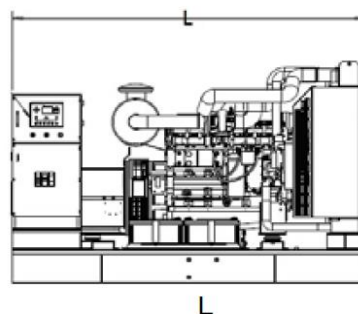

Blue Power gensets are compliant with EC mark which include the following directives:

- * 2006/42/EC Machinery Safety.
- * 2006/95/EC Low Voltage.

P501

Engine Specifications

Engine Model	2206A-E13TAG6
Engine Type	6 Cyl. In-Line
Bore x Stroke (mm)	130 x 157
Displacement (L)	12,5
Engine H.P. at 100% Standby P	583
Compression Ratio	16.3:1
Aspiration Type	Turbo/Chr Air Cooler
Intake Air Flow (Ltr/sec.)	700
Injection Type	MEUI/ECM
Governor Type	Electronic/ecm
Coolant Capacity Eng.	51.4L
Oil Pan Capacity	40L
Electrical System Voltage	24vdc
Max Exhaust Back Pressure	6,8 kPa
Exhaust Gas Flow (Ltr/sec.)	1405 Ltr/sec
Exhaust Gas Temp.	680 C°



A.C. Alternator Data

Leroy Somer Model	FG29A320	Standard AVR Model	R150
Winding Type	12 Lead, 3 Phase	Excitation Type	Shunt
Power Factor	0,8	Voltage Regulation	±1.0%
Insulation Class	H	Max. Overspeed	2250 rpm
Winding Pitch	2/3	THF	<2%
Ingress Protection	IP23	TIF	<50

Alternator Performance Data		60 Hz			
Voltage Series Star (WYE)	380	416	440	480	
Voltage Delta	220	240	254	277	
*kVA Base Rating at 0.8 Pf	400	500	555	600	
Locked Rotor Motor Starting kVA*				600	

*Base Ratings are for Standby - 163°/27°C Rise/Amb.

**at 30% voltage dip, 0.6 Pf

Leroy Somer complies with international standards and regulations: IEC 60034 and derivative, they are designed, manufactured and marketed in ISO 9001 & 14001 environment and can be integrated into a CE market generator set

DEEPSEA FG100

Benefits

- ▶ Single gen-set controller for standby and prime applications
- ▶ Direct Communications with EFI engines
- ▶ All-in-one intuitive & powerful PC tool for configuration/monitoring/control



Features

- | | |
|--|--|
| <ul style="list-style-type: none"> ▶ Standby and Prime power application in one unit ▶ 5 languages in the controller and translator functionality ▶ 3 levels of password security ▶ 3 sets of alternative configurations ▶ Magnetic pick-up input ▶ ECU support and TIER4 Final ready ▶ Plug-in Module concept for more capabilities (Modbus, Internet, SMS, inputs/outputs) ▶ 1 slot for Plug-in modules ▶ Power over USB for controller adjustments ▶ Adjustable D+ threshold ▶ Ventilation pulse ▶ Flexible Choke ▶ Fuel pump control ▶ 3 analog inputs, 6+1 binary inputs, 6 | <ul style="list-style-type: none"> binary outputs ▶ 2 higher current binary outputs ▶ Adjustable delay for binary inputs ▶ Alarms and gen-set status assignable to binary outputs ▶ Run hours source ECU or internal ▶ Real time clock ▶ Multi purpose scheduler functionality ▶ 3 maintenance timers ▶ Detailed history log with up to 150 records ▶ Zero power mode ▶ Possibility to disable protections ▶ Modbus register mapping possibility ▶ Start on Low Battery (only for native prime power configuration) ▶ Cutout dimensions: 172mm x 112mm (same as Intellilite NT family) |
|--|--|



ComAp IntelliLite Control Panel meets the following certificates and standards:

- | | |
|---|---|
| <ul style="list-style-type: none"> • EN61000-6-2 • EN61000-6-4 • EN61010-1 • EN61000-2-1 (-20°C/16h for std version) • EN6100-2-2 (70°C/16h) | <ul style="list-style-type: none"> • EN61000-2-6 (2÷25Hz/ ±1,6mm; 25÷100 Hz/4,0 g) • EN61000-2-27 (a=500 m/s²; T=6 ms) • EN61000-2-30 • EN60529 (front panel IP65, back side IP20) |
|---|---|